

		REVISION	A0
		DATE	2021.11.11
PART NUMBER	Q45D5 TYPE-C	CUSTOMER NAME AND MODEL	

## SPECIFICATION FOR APPROVAL

SKU Q45D5-424-PD45W

CUSTOMER MODEL NO.: \_\_\_\_\_

SAMPLE NO.:\_\_\_\_\_

SERIES PRODUCTS: Q \_\_\_\_\_

PRODUCT NAME: \_\_\_\_\_

OUR MODEL NO.: Q45D5 TYPE-C

Color: Black

DATE: 2021.11.11

CUSTOMER APPROVED SIGNATURE		

Designed by	Checked by	Approved by

Please to sign back after you confirm!

			REVISION	A0
			DATE	2021.11.11
PART NUMBER	Q45D5 TYPE-C		CUSTOMER NAME AND MODEL	
Rev. List/				
Rev. /	Date/	Description/	Design/	
A0	2021.11.11	New Rev. /		

## Content/

1.	<b>Scope</b>	4
2.	<b>Quote Criterion</b>	4、5
3.	<b>Electrical Characteristic</b>	5
4.	<b>Input Characteristics</b>	5
4.1.	<b>Rated Input Voltage</b>	5
4.2.	<b>Input Voltage Range</b>	5
4.3.	<b>Rated Frequency</b>	6
4.4.	<b>Empty loaded wasting</b>	5
4.5.	<b>Frequency Range</b>	6
4.6.	<b>Steady AC Current</b>	6
4.7.	<b>Input Inrush Current</b>	6
5.	<b>Output Characteristics</b>	6
5.1.	<b>Rated Output Voltage</b>	6
5.2.	<b>Rated Power</b>	6
5.3.	<b>Output Ripple and Noise</b>	6
5.4	<b>Efficiency</b>	7
5.5.	<b>Protection</b>	7
5.5.1.	<b>Over Current Protection</b>	7
5.5.2.	<b>Short Circuit Protection</b>	7
5.5.3.	<b>Over voltage protection</b>	7
6.	<b>Reliability Items</b>	7
6.1.	<b>Electrostatic Discharge</b>	7
6.2.	<b>Hi-Pot Test</b>	7
6.3.	<b>Insulation Resistance</b>	7
6.4.	<b>Leakage Current</b>	7
6.5.	<b>Temperature Rise</b>	7
7.	<b>Environmental Requirement</b>	8
7.1.	<b>Operating Temperature</b>	8
7.2.	<b>Storage Temperature</b>	8
7.3.	<b>Operating Humidity</b>	8
7.4.	<b>Storage Humidity</b>	8

		REVISION	A0
		DATE	2021.11.11
PART NUMBER	Q45D5 TYPE-C	CUSTOMER NAME AND MODEL	

<b>8. Mechanical Requirement .....</b>	8
<b>8.1. Input plug type .....</b>	8
<b>8.2. Drop Test .....</b>	8
<b>8.3. Salty Fog Test for Metal Part .....</b>	8
<b>9. Mechanical Characteristics .....</b>	9
<b>9.1. Appearance .....</b>	9
<b>9.2. Case/Resin Materials .....</b>	9
<b>10. Environmental Performances.....</b>	9
<b>10.1.Operating at the Lower temperature .....</b>	9
<b>10.2.Operating at the High Temperature .....</b>	9
<b>10.3.Storage at the Lower Temperature .....</b>	9
<b>10.4.Storage at the Higher Temperature .....</b>	9
<b>10.5.Storage at High Temperature and High Humidity with the Adaptor Turnedon.....</b>	9
<b>10.6.Storage at low Temperature and Low Humidity with the Adaptor Turnedon .....</b>	9
<b>11. Photograph of the Product.....</b>	11、12、13

		REVISION	A0
		DATE	2021.11.11
PART NUMBER	CUSTOMER NAME AND MODEL		
Hiky Power your life	Cathedy GmbH		

## 1. Scope

The specification shall be applied to the field of communications

## 2. Quote Criterion

2.1 Safety:accord with

- ①IEC 62368-1:2014;
- ②EN 62368-1:2014/A11:2017, EK1 557-13, AfPS GS 2019:01 PAK;
- ③EN 62368-1:2014/A11:2017, BS EN 62368-1:2014/A11:2017;
- ④UL 62368-1,2nd Ed, 2014-12-01(Audio/ideo, information and communication technology equipment Part 1: Safety requirements) , CAN/CSA C22.2 No. 62368-1-14, 2nd Ed , Issued: 2014-12-01(Audio/ideo, information and communication technology equipment Part 1: Safety requirements)
- ⑤GB 4943.1-2011,
- ⑥AS/NZS62368-1-2018,
- ⑦JP 62368-1(2020),
- ⑧KC62368-1
- :
- ①IEC 62368-1:2014;
- ②EN 62368-1:2014/A11:2017, EK1 557-13, AfPS GS 2019:01 PAK;
- ③EN 62368-1:2014/A11:2017, BS EN 62368-1:2014/A11:2017;
- ④UL 62368-1,2nd Ed, 2014-12-01(Audio/ideo, information and communication technology equipment Part 1: Safety requirements) , CAN/CSA C22.2 No. 62368-1-14, 2nd Ed , Issued: 2014-12-01(Audio/ideo, information and communication technology equipment Part 1: Safety requirements)
- ⑤GB 4943.1-2011,
- ⑥AS/NZS62368-1-2018,
- ⑦JP 62368-1(2020),
- ⑧KC62368-1

		REVISION	A0
		DATE	2021.11.11
PART NUMBER	Q45D5 TYPE-C	CUSTOMER NAME AND MODEL	


## 2.2 EMI STANDARD EMI

- ①EN 55032:2015/A11:2020, EN IEC 61000-3-2:2019/A1:2021, EN 61000-3-3:2013/A1:2019,  
EN 55035:2017/A11:2020, BS EN 55032:2015/A11:2020, BS EN IEC 61000-3-2:2019/A1:2021,  
BS EN 61000-3-3:2013/A1:2019, BS EN 55035:2017/A11:2020
- ②EN 55032:2015/A11:2020, EN IEC 61000-3-2:2019, EN 61000-3-3:2013/A1:2019,  
EN 55035:2017/A11:2020
- ③GB/T9254:2008, GB17625.1:2012
- ④47 CFR FCC Part 15, Subpart B, ANSI C63.4-2014
- ⑤EN 55032, EN IEC 61000-3-2, EN 61000-3-3, EN 55035, BS EN 55032, BS EN IEC 61000-3-2,  
BS EN 61000-3-3 and BS EN 55035
- ⑥EN 55032, EN 55035, EN IEC 61000-3-2, EN 61000-3-3
- ⑦AS/NZS CISPR 32:2015+A1:2020
- ⑧KN 32, KN 35
- ⑨J55032(H29)

## 3. Electrical Characteristic

### Test Circuit

If the test is to be made on a specified circuit, be sure to use the following circuit.  
(, 11, 12.)

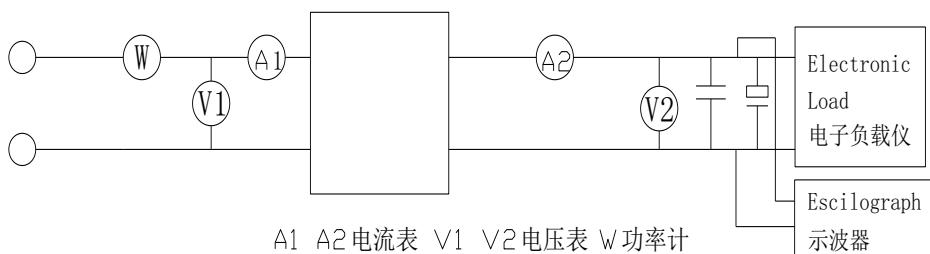

## 4. Input Characteristics

### 4.1. Rated Input Voltage

It is normal for 100Vac to 240Vac input AC voltage.

### 4.2. Input Voltage Range

The adapter shall operate from 90to 264Vac and the range switching is unnecessary.

### 4.3. Rated Frequency

It is normal for 50Hz or 60Hz and single phase.  
(50Hz/60Hz)

### 4.4. Empty loaded wasting

The Input power is 75mW(0.075W) or less in empty loaded. (**Output Voltage:5V**)

		REVISION	A0
		DATE	2021.11.11
PART NUMBER	Q45D5 TYPE-C	CUSTOMER NAME AND MODEL	

#### 4.5. Frequency Range

The adapter shall operate with an input frequency from 47Hz to 63Hz.

#### 4.6. Steady AC Current

Maximum steady state input current is 1.1A (Max) Measured at 100Vac input and maximum load.

#### 4.7. Input Inrush Current

With cold starting, the Input Inrush current should less than 100A.

### 5. Output Characteristics

#### 5.1. Rated Output Voltage Current

Model	5.1 Output Voltage	5.1 Min Load	5.1 Output Current	5.1 Load Regulatio	5.1 Line Regulation	5.1 Output Voltage Range	5.2 Rated Power	5.3 Ripple/Noise (p-p)	5.4 Efficiency	5.5.1 Over Current Protection
Q45D5 TYPE-C	5V	0A	3A	-5%~+8%	±1%	4.75V-5.40V	15W	200mV Max	81.84% Min	4.3A Max
	9V	0A	3A	±5%	±1%	8.55V-9.45V	27W	200mV Max	87.30% Min	4.3A Max
	12V	0A	3A	±5%	±1%	11.4V-12.6V	36W	200mV Max	88.30% Min	4.3A Max
	15V	0A	3A	±5%	±1%	14.25V-15.75V	45W	200mV Max	88.85% Min	4.3A Max
	20V	0A	2.25A	±5%	±1%	19.0V-21.0V	45W	240mV Max	88.85% Min	3.1A Max

#### 5.2. Rated Power

This adapter is capable to support Rated MaxPower continuously at all specified conditions. Note: the test shall be made under the following conditions, unless otherwise specified: Ambient Temperature 25°C, Relative Humidity 35~85%RH Air Pressure 86~106kPa

#### 5.3. Output Ripple and Noise ( )

5.3.1 AC Input 115V/60Hz, 230V/50Hz. Output ripple voltage is less Measured methods: Performed by 20MHz bandwidth in oscilloscope. Applied 0.1uF ceramic capacitor and 10uF electrolytic capacitor across output connector terminals Measured at the end of DC cable.

5.3.2 Turn on delay time:

3Second Max. at 115Vac input and output Max.load.

5.3.3 Rise time:

40 mS Max. at 115Vac input and output Max load.

		<b>REVISION</b>	A0
		<b>DATE</b>	2021.11.11
PART NUMBER	<b>Q45D5 TYPE-C</b>	CUSTOMER NAME AND MODEL	

5.3.4 Hold up time:

5 mS Min.at 115Vac input and output Max.Load.

#### **5.4. Efficiency**

measured at 115Vac and 230Vac input voltage, maximum load . Meet CEC,Energy Star 3.0 (CoC V5-level VI), All data was measurement at pcb end.

#### **5.5. Protection**

##### 5.5.1. Over Current Protection

Output overcurrent protection current is limited and less than the maximum value

##### 5.5.2. Short Circuit Protection

When the output is shorted, the input power is reduced and will not damage, there will be (burp state). When the fault condition is removed, the product will be automatically returned to normal

##### 5.5.3 Over voltage protection

The power supply will auto recovered when faults remove 120%~170%.

### **6. Reliability Items**

#### **6.1. Electrostatic Discharge**

At 150pF: 330Ω, for each point, 10 shots of direct discharge or air discharge. (1 MΩ/SHOT), have no malfunction. Direct discharge: ±4kV, Air discharge: ±8kV

#### **6.2. Hi-Pot Test**

After AC 3000V1min between input plug-DC plug. cutoff current 5mA, the adapter have no failures like damages, arch, insulation damage etc. (at 25° C)

#### **6.3. Insulation Resistance**

At 25° C after DC 500V 1min between input plug- DC plug, insulation resistance 7MΩ/min)

#### **6.4. Leakage Current**

0.25mA maximum, at nominal AC input voltage and frequency

#### **6.5. Temperature Rise**

At 25°C with the rated input 100-240Vac charged to the primary a rated load on the secondary ,every parts of the case surface rise 77°C or less,

		REVISION	A0
		DATE	2021.11.11
PART NUMBER	Q45D5 TYPE-C	CUSTOMER NAME AND MODEL	

## 7. Environmental Requirement

### 7.1. Operating Temperature

-10°C TO 40°C Full load, Normal operation.,,

### 7.2. Storage Temperature ( 8H )

-25°C TO +70°C With package

### 7.3. Operating Humidity

5%(0°C)~90%(40°C),RH,72Hrs,Full load, Normal operating.

### 7.4. Storage Humidity

5% ~ 95% RH. Non-condensing

## 8. Mechanical Requirement

### 8.1. Input plug type

IEC-320-C8

### 8.2. Drop Test

from 100cm height to the most likely to cause adverse results to the horizontal position of the surface drop test bed three times, the adapter in addition to surface scratches, it should be no dysfunction can cause the adapter and other potentially the harm. (Horizontal surface of the test rig shall be composed of at least 13mm thick hardwood installed in two layers of plywood, each layer of plywood thickness 19-20mm, and then placed on a cement base or equivalent on the ground inelastic)

### 8.3. Salty Fog Test for Metal Part

Experiment condition, Salty water thickness: 5%, Equipment Temperature: 35 ~ 40 °C ,put the adapter(unpacking)in the test equipment for 24h, after 24h recovery at 25°C checking the appearance, the metal parts have no erode and rust.

		REVISION	A0
		DATE	2021.11.11
PART NUMBER	Q45D5 TYPE-C	CUSTOMER NAME AND MODEL	

## 9. Mechanical Characteristics

### 9.1. Appearance

Visual inspection the case have no visual abnormality, no obvious nick, burr and other mechanical damage, outer metal have no rust. Use limit sample to check for any failures.

### 9.2. Case/Resin Materials

Flame resistance applies to UL94-V1

## 10. Environmental Performances

### 10.1. Operating at the Lower temperature

At  $-10\pm2^{\circ}\text{C}$ , with the rated voltage 100-240Vac charged to the primary and unloaded and full load on the secondary, no abnormality in electric and mechanical characteristic, after 2 hours recovery at the room temperature.

### 10.2. Operating at the High Temperature

At  $40\pm2^{\circ}\text{C}$ , with the rated voltage 100-240Vac charged to the primary and unloaded and full load on the secondary. No abnormality in electric and mechanical characteristic after 2 hours recovery at the room temperature.

### 10.3. Storage at the Lower Temperature()

At  $-25\pm2^{\circ}\text{C}$ , test of non-operated, No abnormality in electric and mechanical characteristic after 2hours recovery at the room temperature.

### 10.4. Storage at the Higher Temperature

At  $70\pm2^{\circ}\text{C}$ , test of non-operated, No abnormality in electric and mechanical characteristic after 2hours recovery at the room temperature.

### 10.5. Storage at High Temperature and High Humidity with the Adaptor Turnedon()

At  $40\pm2^{\circ}\text{C}, 90\sim95\%\text{RH}$ , test of operating 48hours,no abnormality in electric and mechanical characteristic, after 4hours recovery at the room temperature.

### 10.6. Storage at low Temperature and Low Humidity with the Adaptor Turnedon()


At  $-10^{\circ}\text{C} \pm 2^{\circ}\text{C}, 10\%\sim40\%\text{RH}$ , test of operating 48hours,no abnormality in electric and mechanical characteristic, after 4hours recovery at the room temperature.

		REVISION	A0
		DATE	2021.11.11
PART NUMBER	Q45D5 TYPE-C	CUSTOMER NAME AND MODEL	

## 11. Photograph of the Product

### 11.1 Enclosure:

The power supply size: L61.3 x W61.3 x H30.1mm; : L61.3 x W61.3 x H30.1mm;

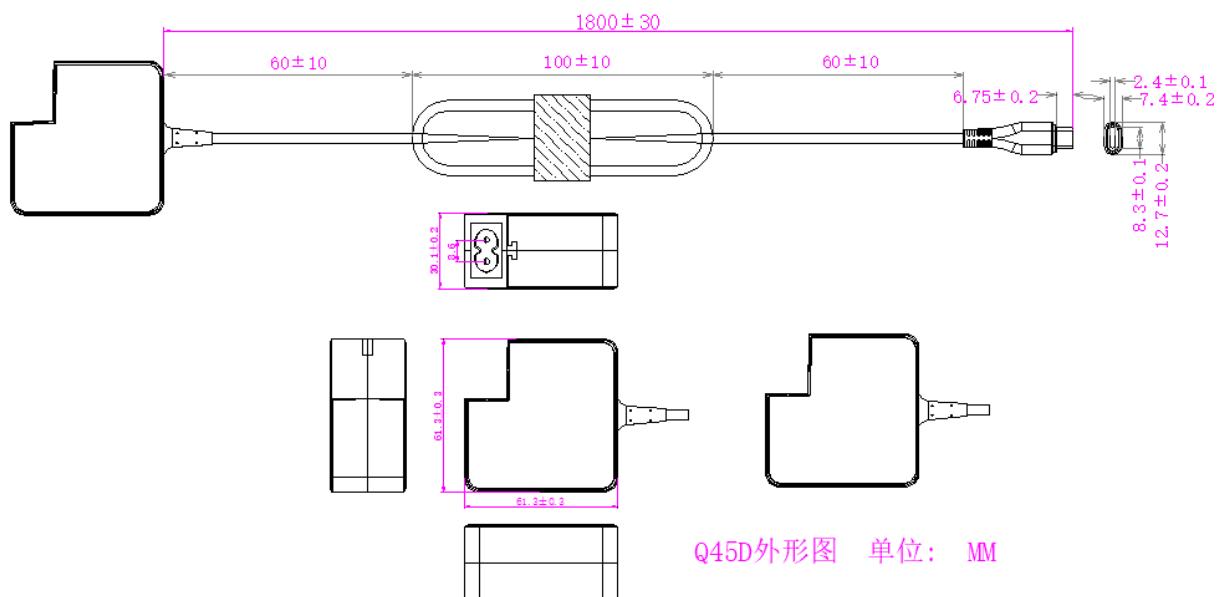

		REVISION	A0
		DATE	2021.11.11
PART NUMBER	Q45D5 TYPE-C	CUSTOMER NAME AND MODEL	



**c UL** US  
LISTED  
E482580  
I.T.E & AV Power Supply



**CE** **CB**

**UK**  
**CA**



		REVISION	A0
		DATE	2021.11.11
PART NUMBER	Q45D5 TYPE-C	CUSTOMER NAME AND MODEL	

